



M 250 M x4


EL VEHICULO MULTIUSOS QUE FACILITA TU TRABAJO
 THE TOOL-CARRIER THAT MAKES YOUR WORK EASIER
 MULTITASK-GERÄTETRÄGER, DAS FAHRZEUG FÜR DEN HARTEN EINSATZ
 LE VEHICULE MULTISERVICE QUI FACILITE TON TRAVAIL



M 250 M



www.ausa.com

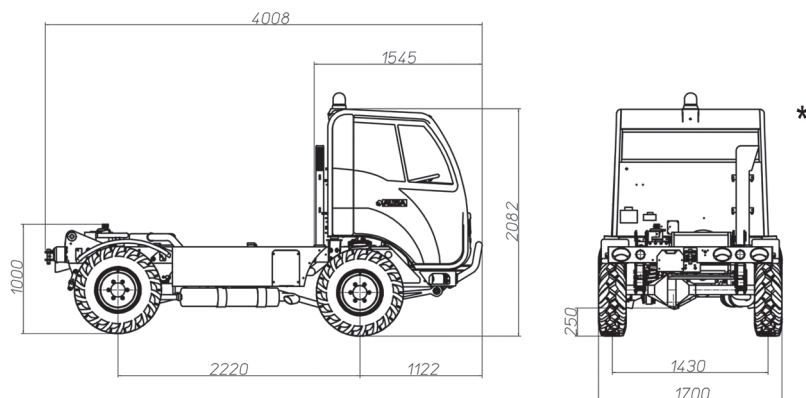

TECHNICAL SPECIFICATIONS

Load capacity (kg)		2500	Gradient negotiable (with full load)		35%
Hopper capacities (l)	Levelled	1500	Brakes	Hydraulic pump. Front wheels with self-ventilated discs and drum discs on rear wheels (with parking brake)	
	Heaped	2000			
Engine	Make	ISUZU	Steering	Orbitrol hydraulic steering	
	Type	4LE2			
	Power acc. (Kw - Cv)	37.5 / 51 (2700 rpm)	Suspension	Front suspension helicoidal spring & hydraulic damper Rear suspension parabolic leaf spring & Hydraulic damper	
	N. of cylinders	4			
	Cooling	Liquid			
Fuel		Diesel	Attack	Obstruction angle	32° (without front plate for attachments)
Fuel capacity (l)		50		Departure angle	62°
Transmission	Mechanical, with 5 forward gears and 1 reverse		Weight (Kg) *	Unloaded weight	2540
				Gross weight	5190
	Ground speed (Km/h)	40		Gross weight per axle	2350 (front axle), 2900 (rear axle)
Traction		4x4 continuous with central differential, COMPEN system	Hydraulic delivery		Steering pump 18 l/min. Service pump 34 l/min

STANDARD EQUIPMENT

Closed cabin with heating	Doors with panning visibility	Rotating beacon	Rough-terrain tyres
---------------------------	-------------------------------	-----------------	---------------------

TRANSPORT

Transport box	Standard box. Dimensions of 1.600 x 2.640 x 300 mm (width x length x height)
	Short standard box. Dimensions of 1.850 x 2.200 x 300 mm (width x length x height)
	Loading capacity of 2.500 Kg
Towing capacity	750 Kg without brake ; 1500 Kg with brake
Trilateral	Standard trilateral: Dimensions: 1.700 x 2.600 x 400 mm (width x length x height)
	Short standard trilateral: 1.850 x 2.200 x 400 mm (width x length x height)
	Unloading angles at 3 directions up to 46° and loading capacity of 2500 Kg
Container-holder	Maximum dimensions of the transport loading: 1.220 x 2.400 mm (width x length) and loading capacity of 2.500 Kg (Distance between arms: 1.360 mm)

PACKS



SUPPORT PACK

Palfinger crane with a capacity of 280 Kg. at a height of 8.10 metres.

Optional: Unique homologated crane in the market to be used as elevator-people. Basket with remote control. Able to elevate 1 person and tools (120 Kg) at a working height of 10.7 metres.

MOVEX PLATFORM

Working height: 15m - Load on basket: 200 Kg (2 persons)

Rotation: 360°

Stabilizers: 4

Total weight of MOVEX device: 1615 Kg

